



## TECHNICAL DATA SHEET

# Lifeboat Light SL-400

Daniamant design and manufacture all of our products in line with the relevant worldwide approvals, technical specifications, current legislation and International directives.

Our mission is to achieve World class performance through partnerships with our suppliers, customers and employees, providing products and services that enhance the safety and security of our customers.

### Daniamant products cover 11 key areas:

- Lifejacket Lights
- Liferaft Lights
- Lifebuoy Lights
- Intrinsically Safe Lights
  - Special Lights
  - LED Flares
- Bridge Navigational Watch Alarm System (BNWAS)
  - Salinometers
  - Oil Level Alarm
- Electronic Inclinator
- Agency for a range of world-renowned safety product brands (supplied to the Danish market)

### Further Information

For further information on our products, please see our website: [www.daniamant.com](http://www.daniamant.com)

| MODEL                      | SL-400                                                 |
|----------------------------|--------------------------------------------------------|
| Part number                | 24-001A                                                |
| Plastic Colour             | Yellow                                                 |
| Light - Output             | Minimum 4,3 cd                                         |
| Light - Duration           | Minimum 12 hours                                       |
| Light - Type               | Flashing                                               |
| Flash                      | 50-70 flash/min                                        |
| Material                   | ABS                                                    |
| Storage Temperature        | -52 C to +65 C                                         |
| Operating Temperature      | -52 C to +65 C                                         |
| Storage Life               | Requires annual inspection                             |
| Weight - Nominal           | 0.350 kg                                               |
| Power                      | 10-30v DC                                              |
| Activation                 | External power                                         |
| Approvals                  | In compliance with SOLAS CH III Life-Saving Appliances |
| - Classification Societies |                                                        |
| Approvals - Country        | See our website for full list of Country approvals     |

## Transport Specification

Transport Regulations are subject to change. Please refer to the latest Product safety Data Sheet at [www.daniamant.com](http://www.daniamant.com) for details.

## Accessories

Cable length can vary on request, please contact Daniamant for details.

## Packing Specification

To minimize shipping costs, all Lifeboat Lights are packed and supplied in boxes of 10 off.

### The dimensions are:

Box of 10 off : 535 x 220 x 190 mm

### Approximate packed weights are:

Box of 10 off : 5.2 kg



**Daniamant Ltd**  
Unit 3, The Admiral Park  
Airport Service Road  
Portsmouth, PO3 5RQ  
United Kingdom

Tel +44 23 92 67 51 00  
Fax +44 23 92 67 51 01  
sales@daniamant.com


**Daniamant ApS**  
Industrivej 24C  
3550 Slangerup  
Denmark

Tel +45 47 37 38 00  
Fax +45 47 37 38 09  
orders@daniamant.com

**Daniamant Electronics A/S**  
Industrivej 24C  
3550 Slangerup  
Denmark

Tel +45 47 37 38 00  
Fax +45 47 37 38 09  
info@daniamant.com

## Outline

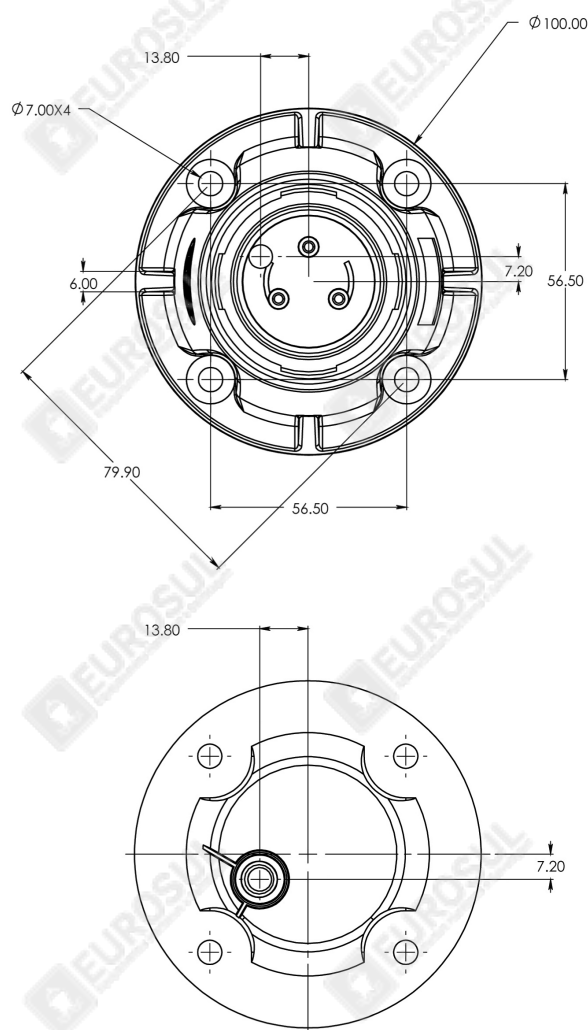

## Installation

Use stainless steel screws, mounting must be on a flat surface to prevent water-ingress. Connect the cable to the external power-supply (10-30 VDC), observe correct polarity.